




KelairPumps

S1F Non-Metallic

SANDPIPER AIR-OPERATED DIAPHRAGM PUMPS

**5-year warranty
(wearing parts excluded)**

**Externally serviceable
air valve design (ESADS)**

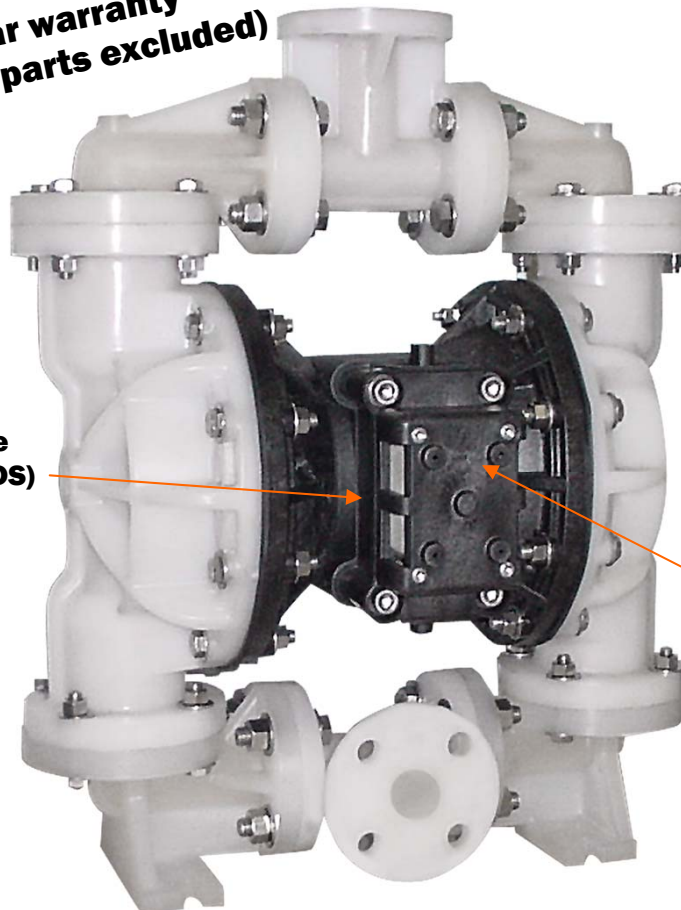

**Fully bolted design
No clamp bands**

**No lube,
non-stall air
valve design
GUARANTEED**


FEATURES & BENEFITS

- Size: 1" 125lb ANSI /DIN universal flange
- Flow: 170 l/m
- Head: 6.8 bar
- Solids: Up to 6 mm
- Wetted Materials
 - Polypropylene
 - PVDF
 - Conductive Propylene
- Non-wetted Materials
 - Polypropylene
 - Conductive Propylene
- Elastomer Options
 - Santoprene
 - Neoprene
 - Buna
 - Viton
 - Teflon

Call Kelair Direct 1300 789 466



INTAKE/DISCHARGE PIPE SIZE 1" ANSI Flange or PN10 25mm DIN Flange	CAPACITY 0 to 45 gallons per minute (0 to 200 litres per minute)	AIR VALVE No-lube, no-stall design	SOLIDS-HANDLING Up to .25 in. (6mm)	HEADS UP TO 100 psi or 231 ft. of water. (7 bar or 70 meters)	DISPLACEMENT/STROKE .17 Gallon / .64 liter
--	---	---	---	--	--

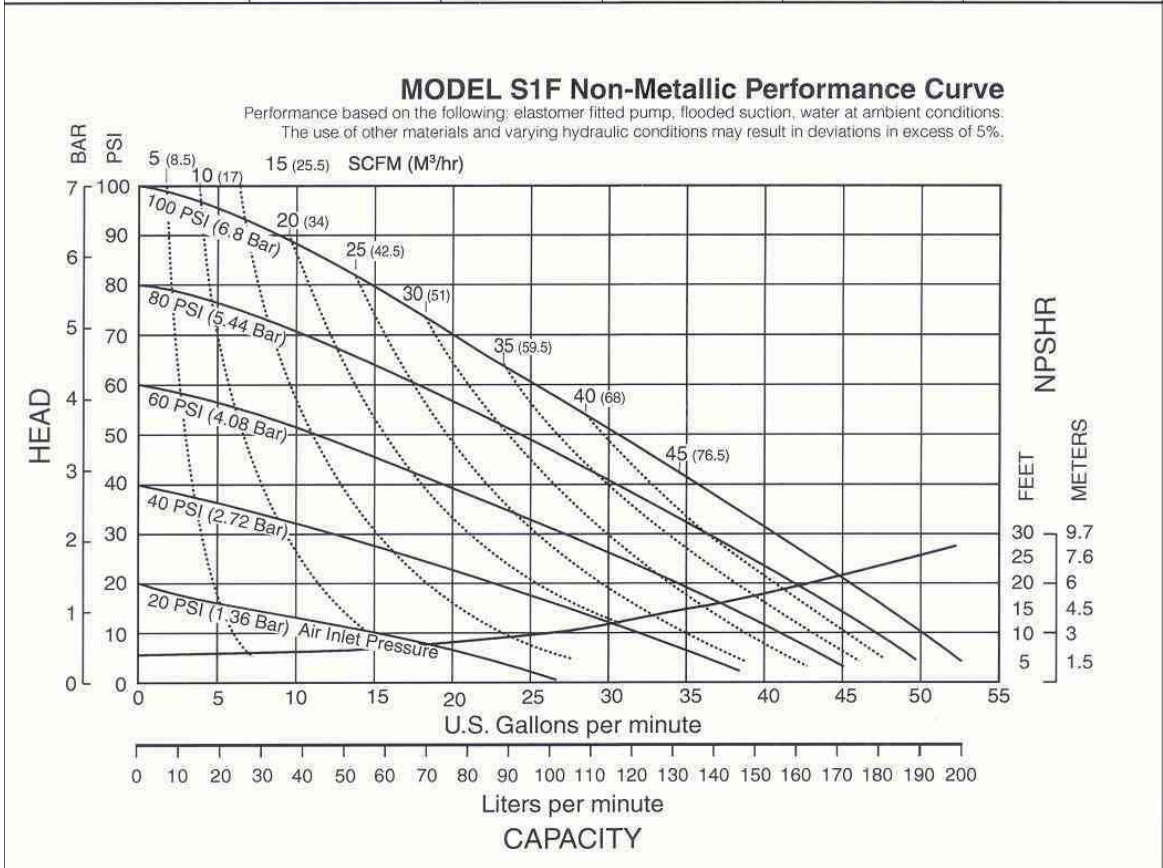

Sandpiper pumps are designed to be powered only by compressed air

