




KelairPumps

S20 Metallic

SANDPIPER AIR-OPERATED DIAPHRAGM PUMPS


**5-year warranty
(wearing parts excluded)**

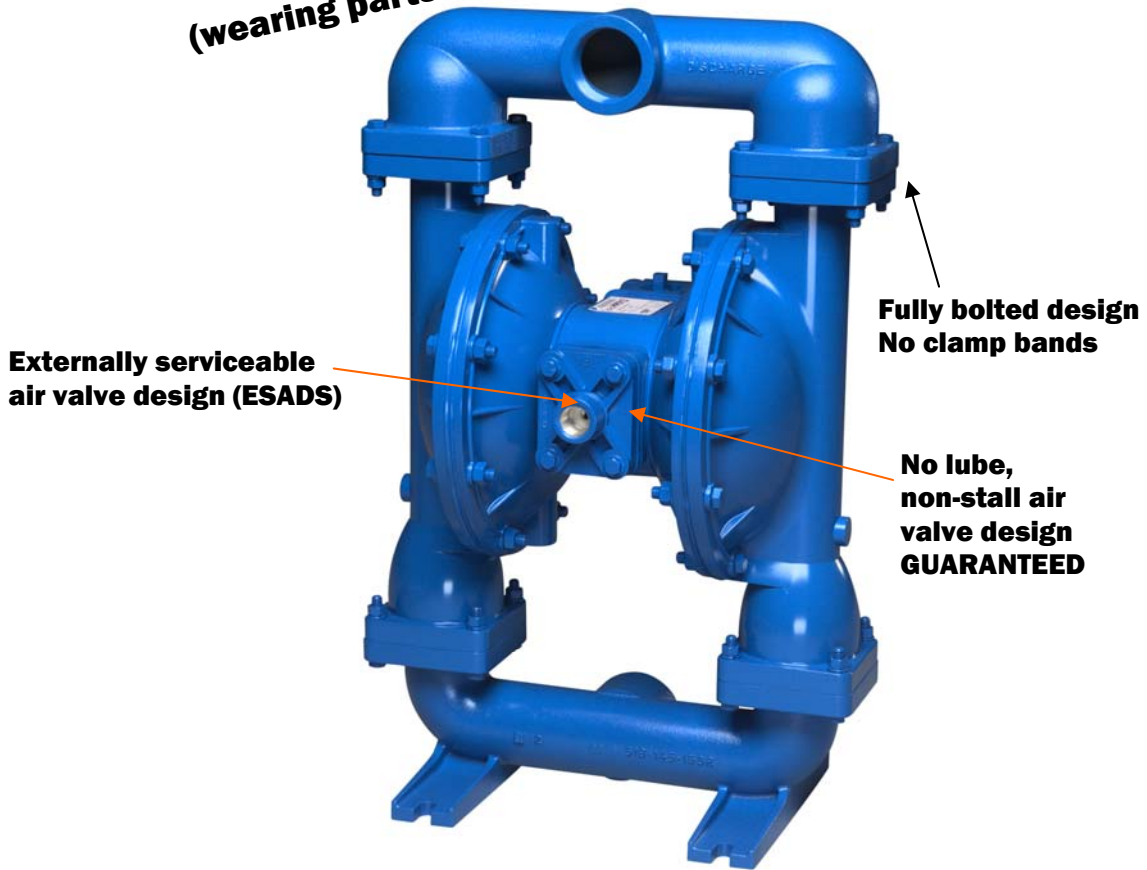

FEATURES & BENEFITS

- Size: 2" BSPT
- Flow: 567 l/m
- Head: 8.6 bar
- Solids: Up to 6mm
- Wetted Materials
 - Aluminium
 - Cast Iron
 - 316 Stainless Steel
 - Hastelloy C
- Non-wetted Materials
 - Aluminium
 - Cast Iron
- Elastomer Options
 - Santoprene
 - Buna N
 - Teflon
 - Neoprene
 - EPDM
 - Viton
 - Uni Rupp PTFE

Call Kelair Direct 1300 789 466






KelairPumps

S20 Metallic

INTAKE/DISCHARGE PIPE SIZE 2" NPT (Internal) 2" BSPT Tapered (Internal)	CAPACITY 0 to 150 gallons per minute (0 to 567 liters per minute)	AIR VALVE No-lube, no-stall design	SOLIDS-HANDLING Up to .25 in. (6mm)	HEADS UP TO 125 psi or 289 ft. of water (8.6 Kg/cm ² or 86 meters)	DISPLACEMENT/STROKE .42 Gallon / 1.59 liter
--	--	---	---	--	---

Sandpiper pumps are designed to be powered only by compressed air

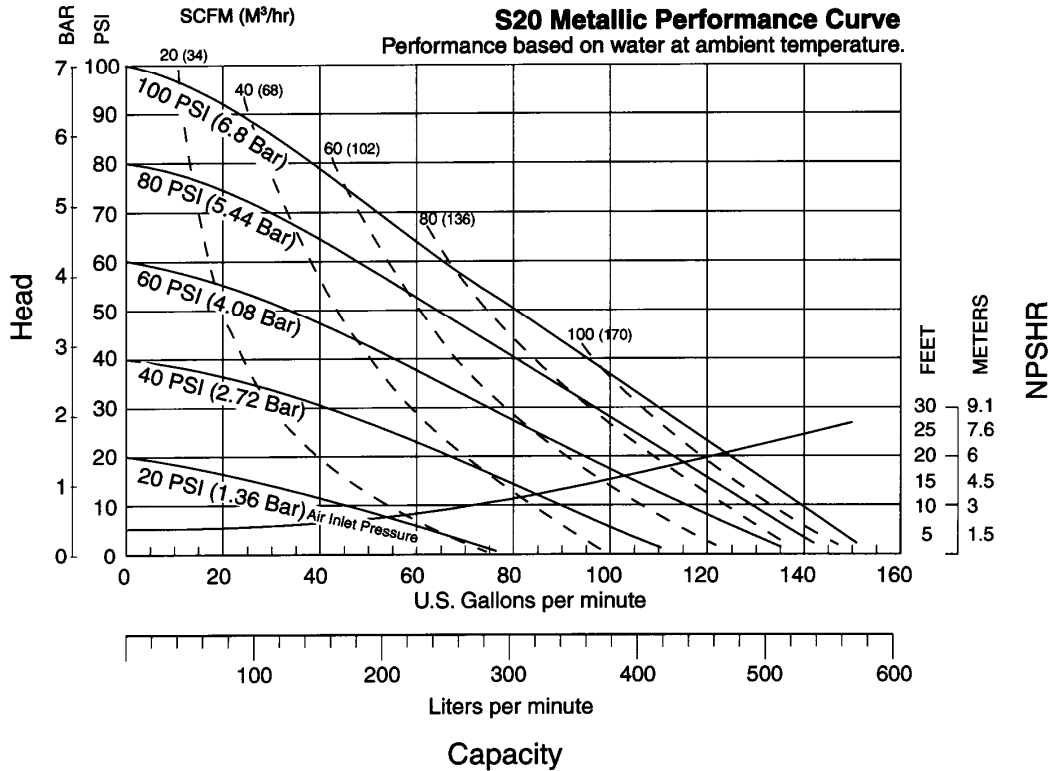

Dimensions in Millimeters
Dimensional Tolerance: ± 3mm

