




S30 Non-Metallic

SANDPIPER AIR-OPERATED DIAPHRAGM PUMPS

KelairPumps

**5-year warranty
(wearing parts excluded)**

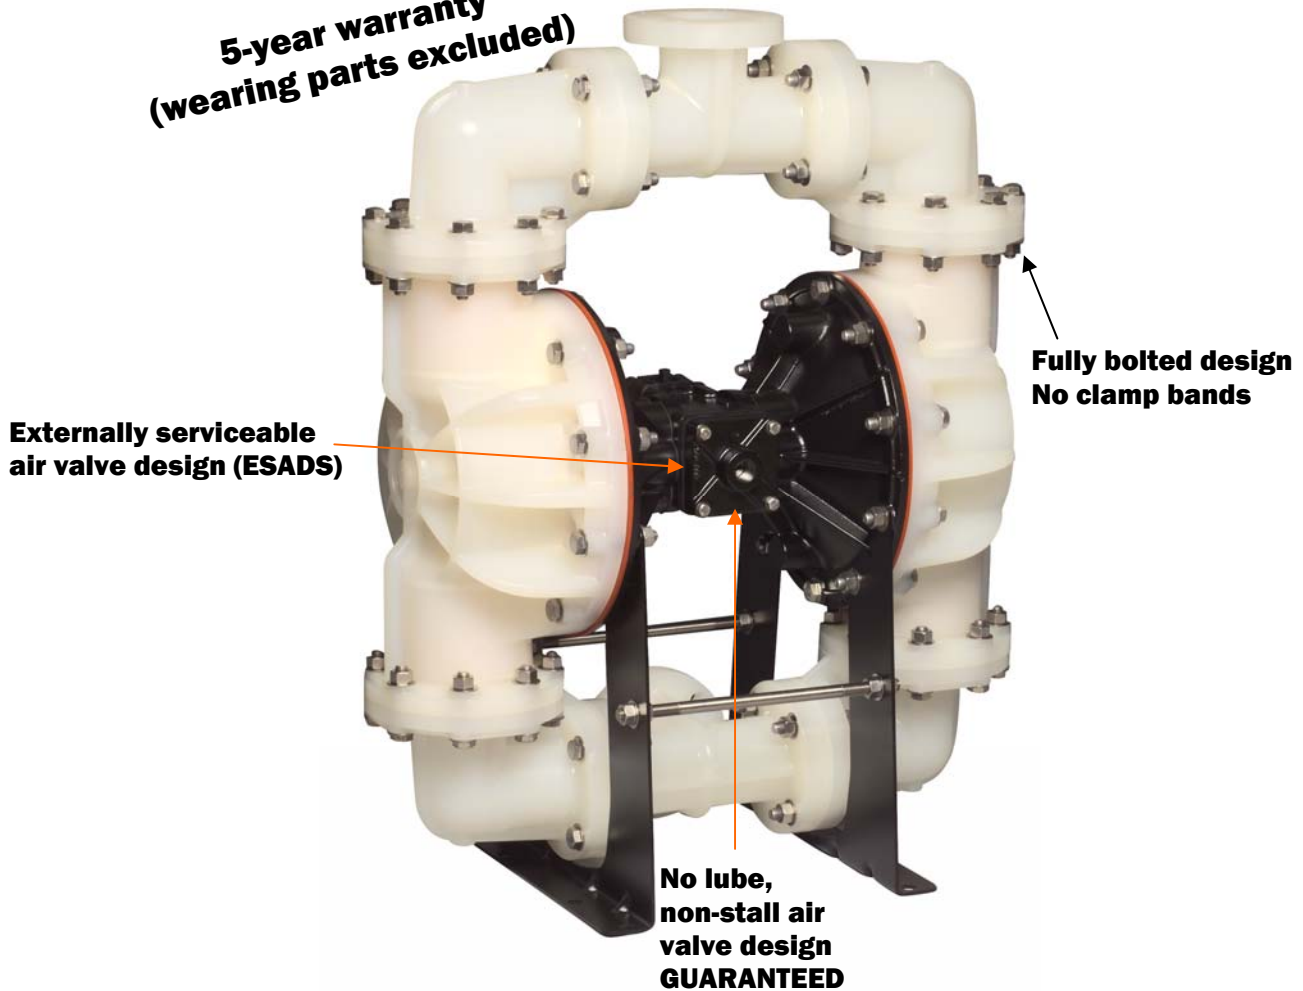

FEATURES & BENEFITS


- Size: 3" 125lb ANSI flange
- Flow: 90 l/m
- Head: 6.8 bar
- Solids: Up to 18 mm
- Wetted Materials
 - Polypropylene
 - PVDF
- Non-wetted Materials
 - Epoxy painted aluminium
- Elastomer Options
 - Santoprene
 - Teflon

Call Kelair Direct 1300 789 466



S30 Non-Metallic

INTAKE/DISCHARGE PIPE SIZE 3" ANSI Flange or 80mm DIN Flange	CAPACITY 0 to 238 gallons per minute (0 to 901 liters per minute)	AIR VALVE No-lube, no-stall design	SOLIDS-HANDLING Up to .71 in. (18mm)	HEADS UP TO 100 psi or 231 ft. of water (7 bar or 70 meters)	DISPLACEMENT/STROKE .9 Gallon / 3.41 liter
---	--	---	--	---	--

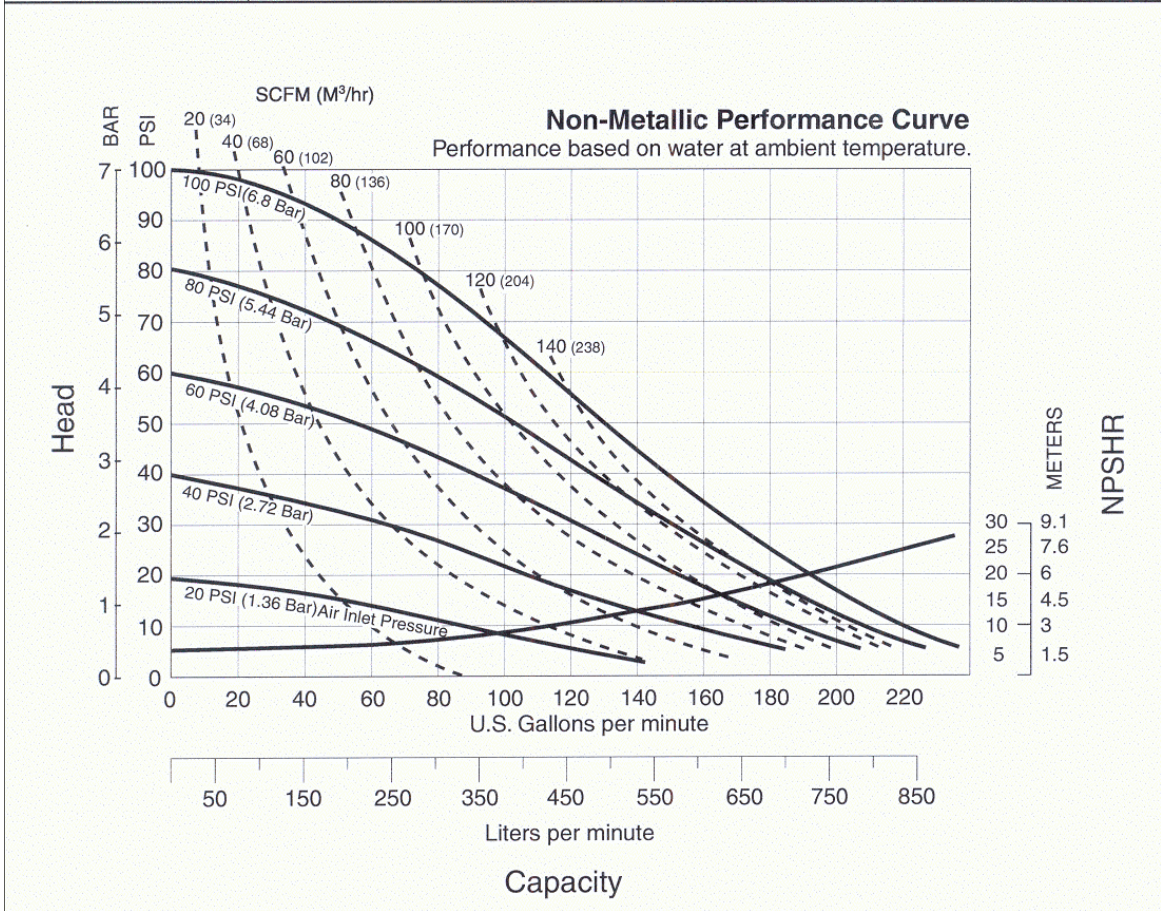

Sandpiper pumps are designed to be powered only by compressed air

